


## Data sheet type 10 mercury free

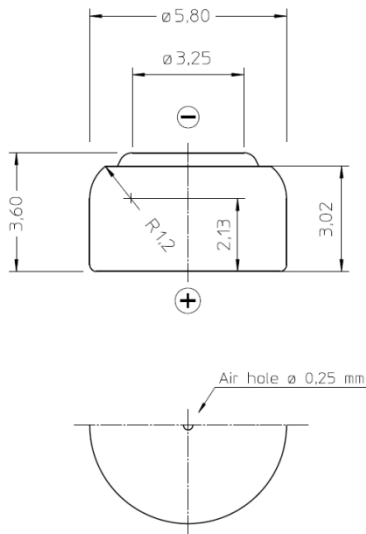

### Specifications:

Chemical system:	Zinc / Air
Nominal voltage:	1,45 V
Typical Capacity:	100 mAh*
IEC Standard Test Capacity:	90 mAh**
IEC High Drain Test Capacity:	87 mAh***
Impedance:	max. 12 $\Omega$ @ 1kHz
Weight:	approx 0,3 g
Volume:	approx 0,085 ccm
Storage:	10-30°C / 20-80 % r.h.
Operating:	0-45°C / 25-70 % r.h.
Short Exposition:	-10-65°C / 5-95 % r.h.

\*1000 Ohms 12h/day to 0.9V at 20°C / 55% r.h.

\*\*IEC Hearing aid standard test 1,05 V at 20°C / 55% r.h. according to IEC 60086-2:2015/DIN EN 60086-2:2016

\*\*\*IEC High Drain Test to 1,1 V at 20°C / 55% r.h. according to IEC 60086-2:2015/DIN EN 60086-2:2016

### Dimensions:

according to IEC 60086-2:2015/DIN EN 60086-2:2016  
IEC: PR 70

