


Data sheet type 312 mercury free

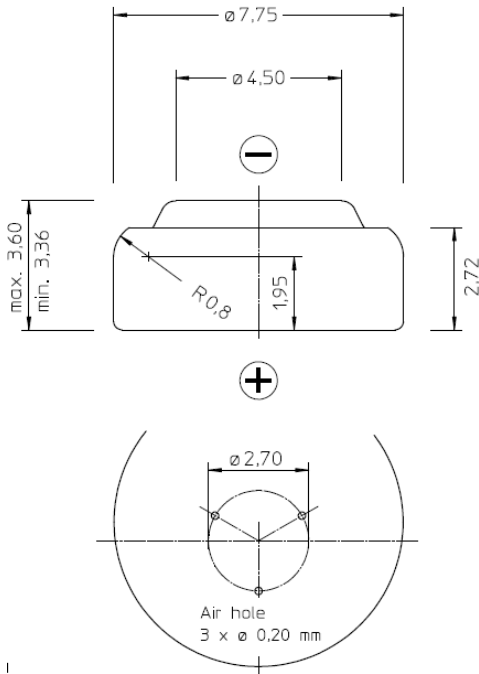

Specifications:

Chemical system:	Zinc / Air
Nominal voltage:	1,45 V
Typical Capacity:	170 mAh*
IEC Standard Test Capacity:	165 mAh**
IEC Wireless Test Capacity:	150 mAh***
Impedance:	max. 7,5 Ω @ 1kHz
Weight:	approx 0,58 g
Volume:	approx 0,16 ccm
Storage:	10-30°C / 20-80 % r.h.
Operating:	0-45°C / 25-70 % r.h.
Short Exposition:	-10-65°C / 5-95 % r.h.

*1000 Ohms 12h/day to 0.9V at 20°C / 55% r.h.


** Hearing aid standard test to 1,05 V at 20°C / 55% r.h.
according to IEC 60086-2:2015/DIN EN 60086-2:2016

***IEC Wireless streaming test to 1.1V at 20°C / 55% r.h.
according to IEC 60086-2:2015/DIN EN 60086-2:2016

Dimensions:

according to IEC 60086-2:2015/DIN EN 60086-2:2016
IEC: PR41

Typical discharge characteristics at 20°C / 55% r.h.:

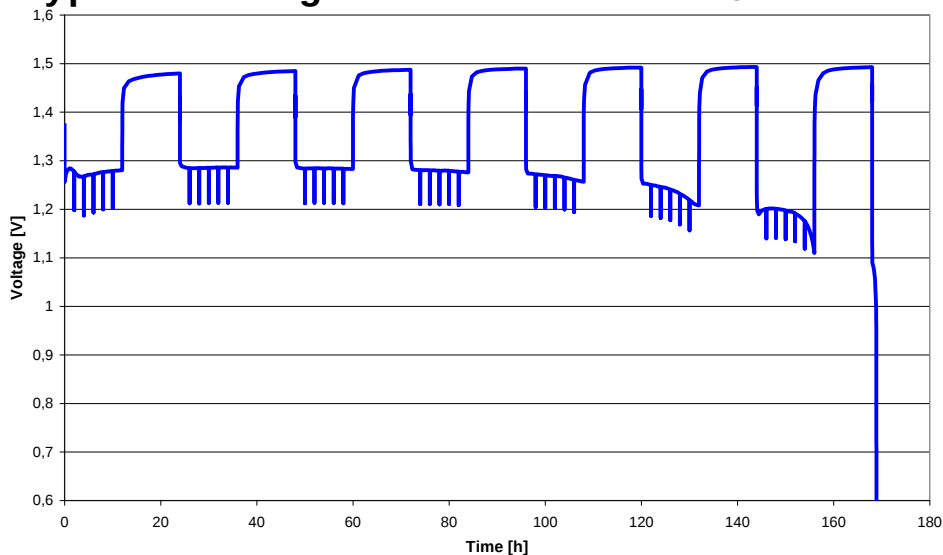

auric Hörsysteme GmbH & Co. KG
 Osnabrücker Str. 2 - 12
 48429 Rheine
 GERMANY

This data is subject to change without prior notice. Performance information is typical. Contact Hansaton for latest information.