


Data sheet type 675 mercury free

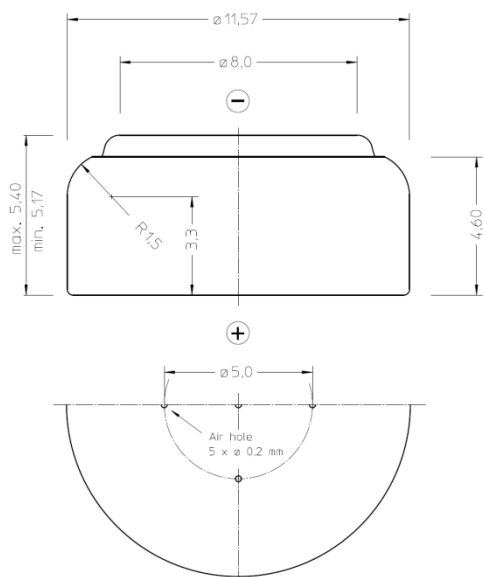

Specifications:

Chemical system:	Zinc / Air
Nominal voltage:	1,45 V
Typical Capacity:	650 mAh*
IEC Standard Test Capacity:	620 mAh**
IEC High Drain Test Capacity:	570 mAh***
Impedance:	max. 4 Ω @ 1kHz
Weight:	approx 1,83 g
Volume:	approx 0,55 ccm
Storage:	10-30°C / 20-80 % r.h.
Operating:	0-45°C / 25-70 % r.h.
Short Exposition:	-10-65°C / 5-95 % r.h.

*180 Ohms 12h/day to 0.9V at 20°C / 55% r.h.


**IEC Hearing aid standard test to 1,05 V at 20°C / 55% r.h. according to IEC 60086-2:2015/DIN EN 60086-2:2016

***IEC High Drain Test to 1,05 V at 20°C / 55% r.h. according to IEC 60086-2:2015/DIN EN 60086-2:2016

Dimensions:

according to IEC 60086-2:2015/DIN EN 60086-2:2016
IEC: PR44

Typical discharge characteristics at 20°C / 55% r.h.:

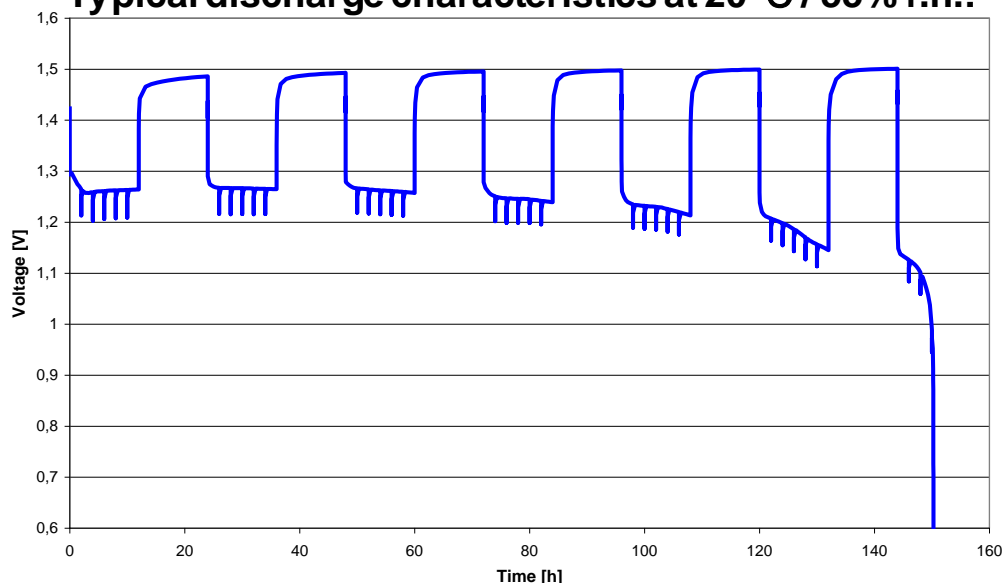

auric Hörsysteme GmbH & Co. KG
Osnabrücker Str. 2 - 12
48429 Rheine
GERMANY

This data is subject to change without prior notice. Performance information is typical. Contact Hansaton for latest information.